


## Ferrofix floor drain Sys 200, Waterproofing layer, Slot grt, SST OT

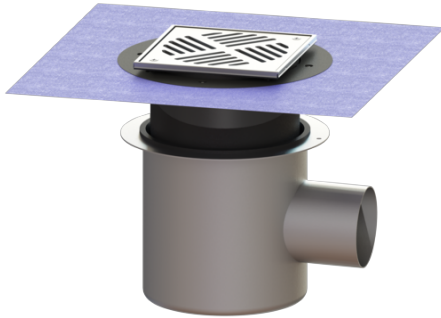

### Article information

Item no.: 142026.52  
GTIN: 4026092006719  
Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

### Description

The Ferrofix stainless steel floor drain is used for point drainage and is equipped with a removable odour trap, a lip seal and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

#### Version:

System:	200
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Connection flange
Sealing water height:	70 mm

#### General characteristics:

Nominal size (DN):	100
Standard:	EN 1253-1

#### Dimensions:

Length:	280 mm
Width:	280 mm

#### Tank:

Number of outlets:	1 ST
--------------------	------

Outlet nominal size (DN): 100  
Outlet nominal size (OD): 110

#### **Drain body:**

Material of drain body: Stainless steel 14301  
Socket version: lateral

Vertical adjustment: vertically adjustable upper section  
Vertical adjustment: 12 - 25 mm

#### **Coverage features:**

Type of cover: Slotted cover  
Cover material: Stainless steel 14301  
Load class: L 15 (EN 1253-1)  
Length: 200 mm  
Width: 200 mm  
Locking: screwed

#### **Grating:**

Rim length: 200 mm  
Rim width: 200 mm

Upper section material: ABS