



## Ecoguss project drain glu. flange DN 80, horiz., Variofix, Slotted cover

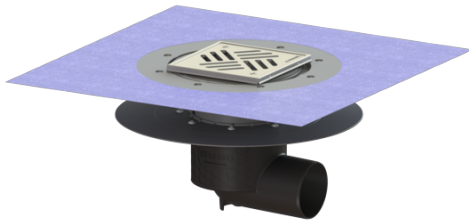

### Article information

Item no.: 48583.51  
 GTIN: 4026092054239  
 Price group: 40

### Advantages

- High-tech Ecoguss composite material
- Ecoguss, highest fire protection standards
- Scientifically confirmed sound protection effect

### Description

The Ecoguss project drain is used for point drainage and is equipped with a glued flange as well as a removable odour trap, a lip seal and a temporary protective cover.

The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius.

The loose flange is used for clamping polymer and elastomer sealing sheets as well as for cold bitumen seals. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

### Version:

|   |   |
|---|---|
| System:                                   | 125   |
| Odour trap:                               | included  |
| Type of waterproofing layer:              | Waterproofing layer   |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body:    | Adhesive flange (suitable for moisture barriers)                |

|  |       |
|--|-------|
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I  |
| Sealing water height:  | 50 mm |

#### General characteristics:

|                      |           |
|----------------------|-----------|
| Nominal size (DN):   | 80        |
| Outer diameter (OD): | 83        |
| Standard:            | EN 1253-1 |

#### Dimensions:

|         |        |
|---------|--------|
| Length: | 348 mm |
| Width:  | 348 mm |

#### Tank:

|                    |      |
|--------------------|------|
| Number of outlets: | 1 ST |
|--------------------|------|

#### Drain body:

|                         |                                     |
|-------------------------|-------------------------------------|
| Material of drain body: | Ecoguss                             |
| Socket version:         | lateral                             |
| Vertical adjustment:    | vertically adjustable upper section |
| Upper section:          | adjustable in three dimensions      |

#### Coverage features:

|                       |                     |
|-----------------------|---------------------|
| Type of cover:        | Slotted cover       |
| Cover material:       | 304 stainless steel |
| Colour of cover:      | silver              |
| Min. flooring height: | 10 mm               |
| Max. flooring height: | 17 mm               |
| Load class:           | K 3 (EN 1253-1)     |
| Length:               | 138 mm              |
| Width:                | 138 mm              |
| Surface:              | Polished SST        |
| Locking:              | screwed             |

#### Grating:

|               |                     |
|---------------|---------------------|
| Rim length:   | 150 mm              |
| Rim width:    | 150 mm              |
| Rim material: | 304 stainless steel |

Shape of upper section: square  
Upper section material: ABS