


Ecoguss drain body glued flange, DN 100, Vertical outlet

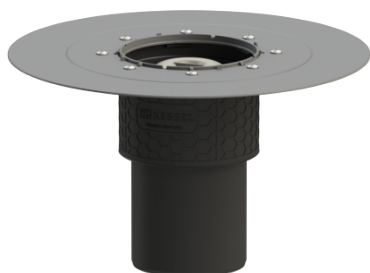

Article information

Item no.: 48611
 GTIN: 4026092032596
 Price group: 40

Description

The Ecoguss base body is used in combination with an attachment piece for point drainage, and is equipped with a removable odor trap, and a protective cover for the construction period.

The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius.

The loose flange is used for clamping polymer and elastomer sealing sheets as well as for cold bitumen seals. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

Version:

| | |
|--|--|
| System: | 125 |
| Odour trap: | included |
| Type of waterproofing layer: | Waterproofing layer |
| Waterproofing layer on the drain body: | Adhesive flange (suitable for moisture barriers) |
| Sealing water height: | 50 mm |

General characteristics:

| | |
|----------------------|-----------|
| Nominal size (DN): | 100 |
| Outer diameter (OD): | 110 |
| Standard: | EN 1253-1 |

Dimensions:

| | |
|-----------|--------|
| Height: | 215 mm |
| Diameter: | 348 mm |

Tank:

| | |
|--------------------|------|
| Number of outlets: | 1 ST |
|--------------------|------|

Drain body:

| | |
|-------------------------|----------|
| Material of drain body: | Ecoguss |
| Socket version: | vertical |

| | |
|------------------|---|
| Fire protection: | Highest fire protection standards are reached using the optionally available Fire-Kit and Quick-Fit |
|------------------|---|