



## Ecoguss project drain, press. fl. DN 50, vert., Variofix, Slotted cover

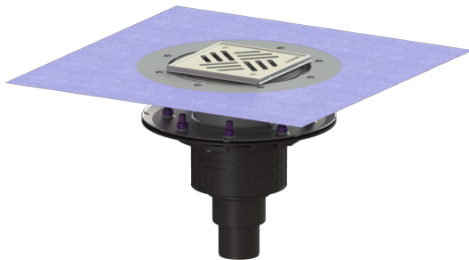

### Article information

Item no.: 48858.51  
 GTIN: 4026092053195  
 Price group: 40

### Advantages

- Scientifically confirmed sound protection effect
- Highest fire protection standards

### Description

The Ecoguss project drain is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap, a lip seal and a temporary protective cover.

The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius.

The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. Only the sealing sheets tested by the manufacturer may be used for watertight seals. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

### Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Press sealing flange (suitable for creating watertight seals)

Sealing water height: 50 mm

#### General characteristics:

Nominal size (DN): 50  
Outer diameter (OD): 58  
Standard: EN 1253-1

#### Dimensions:

Length: 273 mm  
Width: 273 mm

#### Tank:

Number of outlets: 1 ST

#### Drain body:

Material of drain body: Ecoguss  
Socket version: vertical

Vertical adjustment: vertically adjustable upper section  
Upper section: adjustable in three dimensions

#### Coverage features:

Type of cover: Slotted cover  
Cover material: 304 stainless steel  
Colour of cover: silver  
Min. flooring height: 10 mm  
Max. flooring height: 17 mm  
Load class: K 3 (EN 1253-1)  
Length: 138 mm  
Width: 138 mm  
Surface: Polished SST  
Locking: screwed

#### Grating:

Rim length: 150 mm  
Rim width: 150 mm  
Rim material: 304 stainless steel

Shape of upper section: square

Upper section material:  
Fire protection:

ABS  
Highest fire protection standards are reached using  
the optionally available Fire-Kit and Quick-Fit