



## Ferrofix floor drain DN 70, horiz., Waterproofing layer, Slotted grating

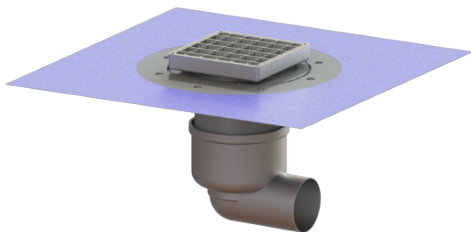

### Article information

Item no.: 54400.21  
 GTIN: 4026092056363  
 Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

### Description

The Ferrofix stainless steel floor drain is used for point drainage and is equipped with a removable odour trap made of stainless steel, a lip seal and a temporary protective cover.

The outlet socket is suitable for connection to SML cast iron pipes.

### Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Connection flange
Sealing water height:	50 mm

### General characteristics:

Nominal size (DN):	70
Outer diameter (OD):	78
Standard:	EN 1253-1

**Dimensions:**

Length: 181 mm  
Width: 142 mm

**Tank:**

Number of outlets: 1 ST

**Drain body:**

Material of drain body: Stainless steel 14301  
Socket version: lateral  
Vertical adjustment: vertically adjustable upper section  
Vertical adjustment: 23 - 40 mm  
Upper section: adjustable in three dimensions

**Coverage features:**

Type of cover: Slotted grating  
Cover material: Stainless steel 14301  
Load class: L 15 (EN 1253-1)  
Length: 138 mm  
Width: 138 mm  
Surface: pickled  
Locking: unlocked

**Grating:**

Rim length: 150 mm  
Rim width: 150 mm

Shape of upper section: square  
Upper section material: ABS