


## Ferrofix floor drain pressure sealing flange Sys 200, vert., Waterproofing layer, Slotted grating

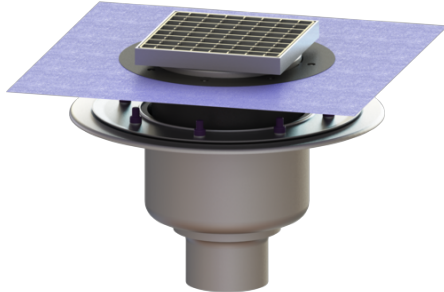

### Article information

Item no.: 55600.21  
GTIN: 4026092056592  
Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

### Description

The Ferrofix System 200 floor drain made of stainless steel is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap made of stainless steel, a lip seal and a temporary protective cover.

The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

### Version:

System:	200
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Press sealing flange (suitable for creating watertight seals)
Sealing water height:	70 mm

### General characteristics:

Nominal size (DN):	100
Outer diameter (OD):	110
Standard:	EN 1253-1

### Dimensions:

Length: 420 mm  
Width: 420 mm

#### **Tank:**

Number of outlets: 1 ST

#### **Drain body:**

Material of drain body: Stainless steel 14301  
Socket version: vertical

Vertical adjustment: vertically adjustable upper section  
Vertical adjustment: 23 - 40 mm  
Upper section: adjustable in three dimensions

#### **Coverage features:**

Type of cover: Slotted grating  
Cover material: Stainless steel 14301  
Load class: L 15 (EN 1253-1)  
Length: 190 mm  
Width: 190 mm  
Height: 30 mm  
Surface: pickled  
Locking: unlocked

#### **Grating:**

Rim length: 200 mm  
Rim width: 200 mm

Shape of upper section: square  
Upper section material: ABS