


## Ferrofix renovation drain GI fl., DN 50, horizontal, Slotted grating

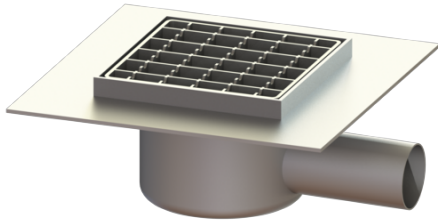

### Article information

Item no.: 59315  
GTIN: 4026092103029  
Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- ideal for the food industry
- catering kitchens and swimming pools
- Including odour trap

### Description

The Ferrofix stainless steel renovation drain is equipped with a horizontal outlet DN 50 as well as a removable odour trap.

#### Version:

System: 125  
Odour trap: included

Waterproofing layer on the upper section: Adhesive flange (suitable for moisture barriers)  
Sealing water height: 50 mm

#### General characteristics:

Nominal size (DN): 50  
Outer diameter (OD): 50

#### Dimensions:

Length: 273 mm  
Width: 248 mm  
Height: 107 mm  
Max. design height: 107 mm

#### Tank:

Number of outlets: 1 ST

**Drain body:**

Material of drain body: Stainless steel 14301  
Socket version: lateral

**Coverage features:**

Type of cover: Slotted grating  
Cover material: 304 stainless steel  
Load class: L 15 (EN 1253-1)  
Length: 138 mm  
Width: 138 mm  
Locking: unlocked

**Grating:**

Rim length: 148 mm  
Rim width: 148 mm

Upper section material: Stainless steel 14301  
Discharge rate (l/s) with 20 mm backwater: 0.8 l/s