


## Ferrofix renovation drain GI fl., DN 50, horizontal, Slotted grating

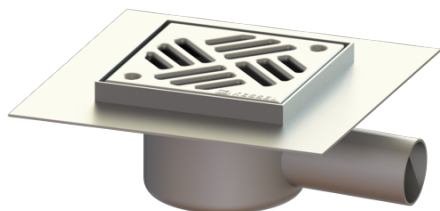

### Article information

Item no.: 59335  
 GTIN: 4026092103043  
 Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- ideal for the food industry
- catering kitchens and swimming pools
- Including odour trap

### Description

The Ferrofix stainless steel renovation drain is equipped with a horizontal outlet DN 50 as well as a removable odour trap.

#### Version:

System:	125
Odour trap:	included
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)
Sealing water height:	50 mm

#### General characteristics:

Nominal size (DN):	50
Outer diameter (OD):	50

#### Dimensions:

Length:	273 mm
Width:	248 mm
Height:	100 mm
Max. design height:	100 mm

#### Tank:

Number of outlets:	1 ST
--------------------	------

**Drain body:**

Material of drain body:	Stainless steel 14301
Socket version:	lateral

**Coverage features:**

Type of cover:	Slotted cover
Cover material:	304 stainless steel
Load class:	K 3 (EN 1253-1)
Length:	138 mm
Width:	138 mm
Locking:	screwed

**Grating:**

Rim length:	148 mm
Rim width:	148 mm

Upper section material:	Stainless steel 14301
Discharge rate (l/s) with 20 mm backwater:	0.8 l/s