
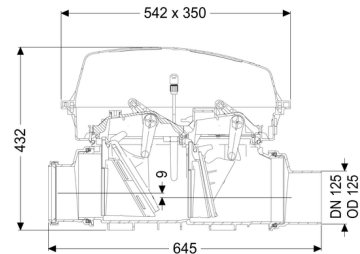


## Staufix FKA automatic backwater valve DN 125, exposed



### Article information

Item no.: 84125  
 GTIN: 4026092046340  
 Price group: 30

### Advantages

- Safe, motor-driven closure system with optical probe
- Fast, simple and toolless maintenance
- Available as a complete set or module set

### Description

The Premium automatic backwater valve for faecal and faecal-free wastewater is equipped with a motor-driven closure system which is closed automatically in the event of backwater. A second closure system serves as an emergency closure to be closed by hand.

The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact, or alarm and collective fault messages can be output via a GSM interface.

Thanks to the modular KESSEL system, existing systems can easily be converted to a Pumpfix F backwater pumping station.

Type of wastewater: wastewater with sewage  
 Installation situation: exposed drainage pipe

### Version:

Emergency closure: yes  
 Delivery state: installation-ready  
 Backwater protection: Type 3  
 Number of mechanical backwater flaps: 1  
 Number of motor-driven backwater flaps: 1

**General characteristics:**

Nominal size (DN):	125
Outer diameter (OD):	125
Colour:	black
Standard:	EN 13564

**Dimensions:**

Length:	645 mm
Width:	350 mm
Height:	422 mm

**Drain body:**

Socket version:	including spigot and socket
-----------------	-----------------------------

**Coverage features:**

Type of cover:	Protective cover
Cover material:	Polymer
Colour of cover:	transparent
Length:	542 mm
Width:	350 mm
Height:	165 mm
Locking:	Clip closure

Vertical drop between inlet and outlet:	9 mm
Cable length:	5 m
Motor type:	KSM 140
Protection class motor:	IP 68 (3m/48h)
Protection class probe:	IP 68 (3m/48h)

**Control:**

Control unit:	Comfort
Operating voltage:	230 V
Mains frequency:	50 Hz
Self-diagnosis system (SDS):	yes
Battery buffering:	yes
Multi-line display:	yes
Log book function:	yes
USB interface:	yes
GSM interface:	yes
Potential-free contact:	optional
Protection class control unit:	IP 54

Length of mains cable for control unit:	1.4 m
Type of level measurement:	optical
Level measurement instrument:	optical probe
Alarm sensor:	optical probe