


EasySink sediment separator free, NS 1

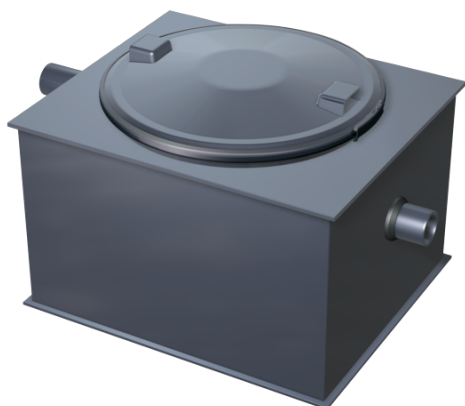

Article information

Item no.: 97201/000
 GTIN: 4026092026830
 Price group: 60

Advantages

- Waterproof and resistant to aggressive wastewater
- Odour-tight tank
- Low-maintenance operation

Description

The sediment separator is suitable for exposed installation in frost-protected rooms. The collection tank is equipped with a removable sediment tank (NS 2 with two sediment tanks) both made of permanently resistant polymer (PE). An odour trap is installed in the outlet. An odour-tight cover with quick-release closure makes easy access possible for cleaning and maintenance work.

20 year polyethylene warranty.
 Installation situation:

free-standing set-up

Version:

Type of disposal:
 Odour trap:
 Nominal size (NS):

manual with suction hose
 included
 1

Delivery state:

Installation-ready (connection parts must be connected on site)

General characteristics:

Material:

PE

Dimensions:

Set-up area, length: 660 mm
 Set-up area, width: 400 mm
 Set-up area, height: 470 mm
 Required access area, length: 570 mm

Required access area, width: 400 mm

Tank:

Inlet nominal size (DN):	50
Inlet nominal size (OD):	50 mm
Outlet nominal size (DN):	50
Outlet nominal size (OD):	50 mm
Distance pipe bottom inlet to tank bottom:	305 mm
Distance pipe bottom outlet to tank bottom:	195 mm
Clear width of entry (LW):	305 mm
Connection inlet/outlet sockets:	PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS

Coverage features:

Type of cover:	Cover
Cover material:	Polymer
Colour of cover:	black
Length:	370 mm
Width:	370 mm
Tightness:	odour-tight
Locking:	Quick-release closure

Control:

Control unit:	no
Volume of collecting tank:	13 l