

## Engineering system chamber Ø 1000 with access opening Ø 600

for combination with engineering system base *Aquapump XL*

EN 13598 Part 2 Z-42.1-527

Made of polyethylene PE-HD

**Installation:** For underground installation; handles groundwater depths up to 3.000 mm


**Modular design comprising:**

- Chamber rings with access steps fitted
- With telescopic height adjustable upper section
- Round cover made of cast iron
- Includes all sealing gaskets and wedge connectors required for installation

**Delivery:** As individual elements

**Remark:** Covers surface water tight

**Note:** Additional installation depths (on request)



Installation depth D in mm	Class A/B	Class D
	Art. no.	Art. no.
D1: 380 - 629*	874 00 00	874 00 01
D2: 630 - 879*	874 00 06	874 00 07
D3: 880 - 1129*	874 00 12	874 00 13
D4: 1130 - 1379	874 00 18	874 00 19
D5: 1380 - 1629	874 00 24	874 00 25
D6: 1630 - 1879	874 00 30	874 00 31
D7: 1880 - 2129	874 00 36	874 00 37
D8: 2130 - 2379	874 00 42	874 00 43
D9: 2380 - 2629	874 00 48	874 00 49
D10: 2630 - 2879	874 00 54	874 00 55
D11: 2880 - 3129	874 00 60	874 00 61
D12: 3130 - 3379**	874 00 66	874 00 67
D13: 3380 - 3629**	874 00 72	874 00 73
D14: 3630 - 3879**	874 00 78	874 00 79
D15: 3880 - 4129**	874 00 84	874 00 85

\* Installation depth D 1 - D 3 only in combination with pumping station Wet installation

\*\* Installation depth D 12 -15 pay attention to maximum installation depth 5.000 mm in combination with engineering system base

## Engineering system chamber Ø 1000 with access opening Ø 800

for combination with engineering system base *Aquapump XL*

EN 13598 Part 2 Z-42.1-527

Made of polyethylene PE-HD

**Installation:** For installation in the concrete slab; handles groundwater depths up to 3.000 mm


**Modular design comprising:**

- For waterproof concrete with flange and counter flange
- Chamber rings with access steps fitted
- With telescopic height adjustable upper section
- Square cover made of stainless steel, class A/L 15 or round cover in class K 3
- Includes all sealing gaskets and wedge connectors required for installation

**Delivery:** As individual elements

**Remark:** Covers surface water tight

**Note:** Additional installation depths, upper sections and covers class B/D (on request)

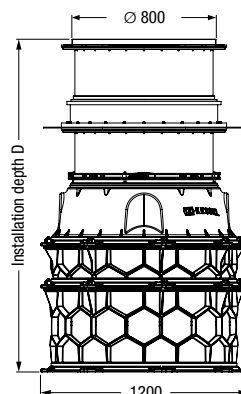

### Cover tileable, square

Installation depth D in mm	Art. no.
668 - 917	874 00 03
918 - 1167	874 00 09
1168 - 1417	874 00 15
1418 - 1667	874 00 21
1668 - 1917	874 00 27

### Cover not tileable, square, anti-slip

Installation depth D in mm	Art. no.
653 - 902	874 00 05
903 - 1152	874 00 11
1153 - 1402	874 00 17
1403 - 1652	874 00 23
1653 - 1902	874 00 29

### Cover not tileable, round

Installation depth D in mm	Art. no.
638 - 887	874 02 22
888 - 1137	874 02 23
1138 - 1387	874 02 24
1388 - 1637	874 02 25
1638 - 1887	874 02 26