

Grease separator *EasyClean* round free Direct NS 10 – 20

for free-standing installation



EN 1825

Tank

Manufactured from virgin, non-recycled polyethylene, for free-standing installation in frost-protected areas, with integrated sludge trap, with integrated sloped base directing wastewater into mixing / disposal pump, twin access covers with quick-release odour tight covers, with suction device installed for the joint disposal of contents of sludge trap and grease separator chamber, intake pipe 75 mm OD PN 10 in accordance with DIN 2501, Storz-B coupling R 2 1/2 for connection to the disposal vehicle. Inlet and outlet Ø 160 / 200 mm for the connection to PE-HD pipes according to DIN 19537, HT pipes according to DIN 19560, PP or AS.

Disposal System

Direct version with factory installed pressure pipe suction outlet - requires disposal truck with vacuum system for separator disposal, disposal is completely odour free.

Delivery: System completely assembled.



➤ **Accessories:** Inspection window and refill inlet, sampling chamber; lifting stations see chapter "3", pages 361 – 363

➤ **Technical note:** page 360



without *SonicControl*

NS	Art. no.
Without accessories	
NS 10	93 010.05/D
NS 15	93 015.05/D
NS 20	93 020.05/D

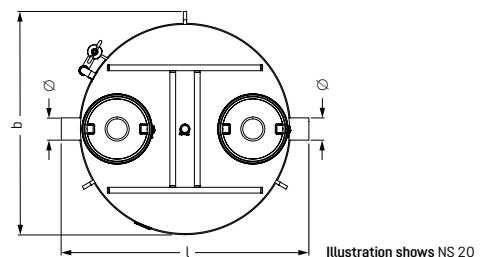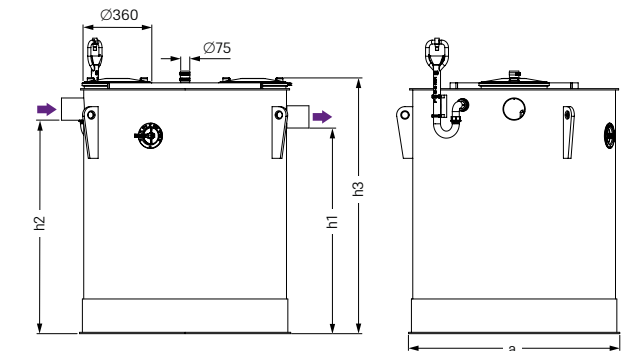

NS	Ø (mm)	a (mm)	Installation dimension l × b (mm)	h1 (mm)	h2 (mm)	h3 (mm)	Sludge trap (l)	Water and grease (l)	Grease storage (l)	Total (l)
10	160	1570	1900 × 1690	1500	1570	1910	1000	1500	400	2500
15	200	1880	2230 × 1922	1550	1620	2020	1500	2300	600	3800
20	200	1880	2230 × 1922	1850	1920	2300	2000	2650	800	4650

Ø = Outer diameter

