

Accessories

Grease separators for free-standing installation

SonicControl level sensing system

Art. no.

level sensing system

Compatibility: For grease separators for free-standing installation according to EN 1825

Inclusive: Ultra sonic sensor for electronic measurement, display and control of the grease layer thickness and the water temperature; power connection, battery back up, connection for remote speaker; installation set with easy assembly and maintenance; control unit with optical and audible alarm with potential free contact; electronic log book with 12 month capacity. Data transfer by telemetry.

Voltage: 230 V ~ 50 Hz

Protection type: IP 54

Plug: Schuko 1.5 m

Cable length: 10 m (extendable on-site to 60 meters)



917 821

LoRa add-on printed circuit board

Art. no.

LoRa add-on printed circuit board

Compatibility: For wireless data transfer between the SonicControl control unit and the building control system from production year 2022 or a portal by means of LoRa WAN (on site)

72 999

Cable access conduit

Art. no.

Cable access conduit

Compatibility: For grease separators according to EN 1825 and DIN 4040; for watertight connection of *SonicControl* cable into separator chamber

Inclusive: Gasket, cable connection, extension, sensor bracket

Note: Conduit pipe with chase wire should be planned; requires 50 mm OD conduit pipe (PE-HD) -sourced on-site. Max. distance 30 m



917 823

Cable extension set for *SonicControl FA*

Art. no.

10 m extension

917 871

20 m extension

917 872

30 m extension

917 873

extendable on-site to 60 meters




Refill inlet

Art. no.

Refill inlet

Compatibility: According to DIN 1988, for connection to filling and rinsing connection of the separation systems for free-standing installation according to EN 1825

Inclusive: Two pipe clamps, element with pipe sealing gasket Ø 63

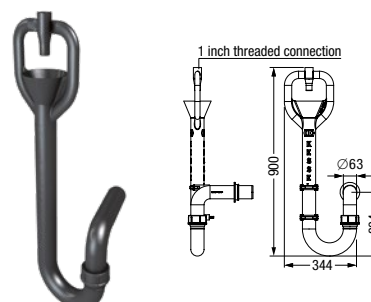

915 800